



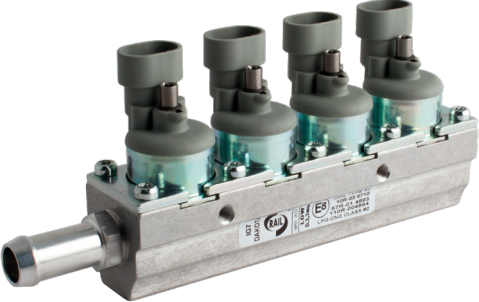



BASIC TECHNICAL FEATURES OF INJECTORS FOR THE APPLICATION:

BI-FUEL, PASSENGER VEHICLES & LIGHT COMMERCIAL VEHICLES - MULTIPOINT INJECTION

	IG1		IG1 APACHE		IG1 APACHE HD	IG7 DAKOTA		IG4 AFTER MARKET	
									
						<i>LP VERSION</i>	<i>LHF VERSION</i>	<i>LP VERSION</i>	<i>LHF VERSION</i>
FEATURES	<i>For 2 Ohm</i>	<i>For 3 Ohm</i>	<i>For 2 Ohm</i>	<i>For 3 Ohm</i>	<i>Only 2 Ohm Available</i>	<i>Only 2 Ohm Available</i>		<i>Only 2 Ohm Available</i>	
FUEL TYPE ON APPLICATION	LPG - CNG		LPG - CNG		LPG - CNG	LPG - CNG		LPG - CNG	
OPENING TIME (ms)	2,6	3,2	2,8	3,2	2,5	1,7	1,8	2	2,1
POWER RANGE FOR LPG 1 BAR (kW)	FROM 11 TO 33 kW/ PER CYLINDER		FROM 11 TO 47 kW/ PER CYLINDER		FROM 11 TO 33 kW/ PER CYLINDER	FROM 12 TO 30 kW/ PER CYLINDER	FROM 11 TO 45 kW/ PER CYLINDER	FROM 12 TO 30 kW/ PER CYLINDER	FROM 11 TO 45 kW/ PER CYLINDER
POWER RANGE FOR CNG 2 BAR (kW)	FROM 11 TO 29 kW/ PER CYLINDER		FROM 11 TO 39 kW/ PER CYLINDER		FROM 11 TO 30 kW/ PER CYLINDER	FROM 10 TO 26 kW/ PER CYLINDER	FROM 10 TO 37 kW/ PER CYLINDER	FROM 10 TO 26 kW/ PER CYLINDER	FROM 10 TO 37 kW/ PER CYLINDER
DURABILITY	250 MILLION CYCLES		250 MILLION CYCLES		500 MILLION CYCLES	1 BILLION CYCLES	700 MILLION CYCLES	1 BILLION CYCLES	700 MILLION CYCLES
SEGMENT	ENTRY LEVEL		ENTRY-MEDIUM LEVEL		MEDIUM LEVEL	HIGH LEVEL		HIGH LEVEL	